

## Karakteristikler



- Her iç mimariye uygun, ??k, sade ve ??a?da? tasar?m.
- Ön panel mü?terinin iste?ine göre logolar, ???kland?rma, yaz?lar veya güvenlik sinyalleriyle özelle?tirilebilir.
- Kenars?z plastik yan k?l?fi?, kendini ta??yabilen ??elik yuvarlak kasa, standart olarak yap?sal epoksi-polyester RAL9016 beyaz boyayla cilalan?r. Di?er renkler iste?e tabiidir.
- Üstteki gizli hava giri?i, ünitenin ve hava giri?i ?zgaras?n? görmez.
- Anodize edilmi? alüminyum priz pervaneleri, kanat ?eklinde.
- 2-h?zl? d??tan rotor motoru tarafından hareket ettirilen dü?ük sesli bükümlü ??apraz ak?m fanlar?.
- "P" type with water heated coil and integrated regulation for ON/OFF or three stages 0-10V proportional valve. "E" tipi elektrik korumal? elementler, birle?ik ayarl? üç evre. "A" tipi ?s?tmas?z, sadece hava ile.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m RJ11 cable and remote control. Optional: intelligent Clever Pro Control (automatic, programmable, ModBus for PKC, timer, etc.)

## Ki?iselle?tirme

50Hz

## Is?nmam??

Model	(m <sup>3</sup> /h)	(m)
ARIS 1000 A	2,5-3,5	
ARIS 1500 A	2,5-3,5	
ARIS 2000 A	2,5-3,5	

## Elektrikli Is?tma

Model	(m <sup>3</sup> /h)	(kW)	(m)
ARIS 1000 E	2,5-3,5		
ARIS 1500 E	2,5-3,5		
ARIS 2000 E	2,5-3,5		

## Su Is?tma




Model	(m <sup>3</sup> /h)	(kW)	(kW)	(m)
ARIS 1000 P86	2,5-3,5			
ARIS 1500 P86	2,5-3,5			
ARIS 2000 P86	2,5-3,5			
ARIS 1000 P64	2,5-3,5			
ARIS 1500 P64	2,5-3,5			
ARIS 2000 P64	2,5-3,5			

60Hz

## Is?nmam??

Model	(m <sup>3</sup> /h)	(m)
ARIS 1000 A 60Hz	2,2-2,8	
ARIS 1500 A 60Hz	2,2-2,8	
ARIS 2000 A 60Hz	2,2-2,8	

Boyutlar

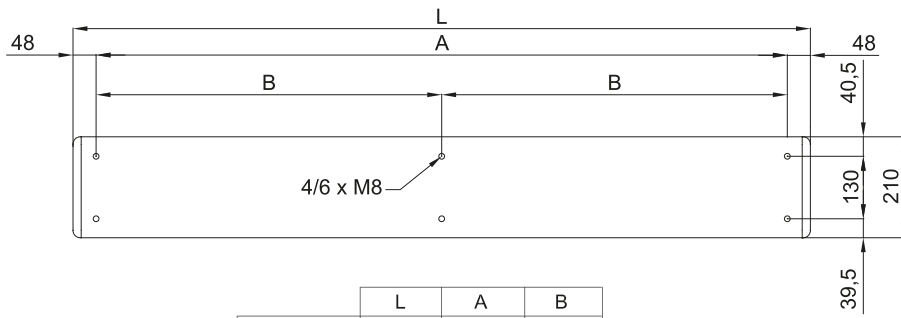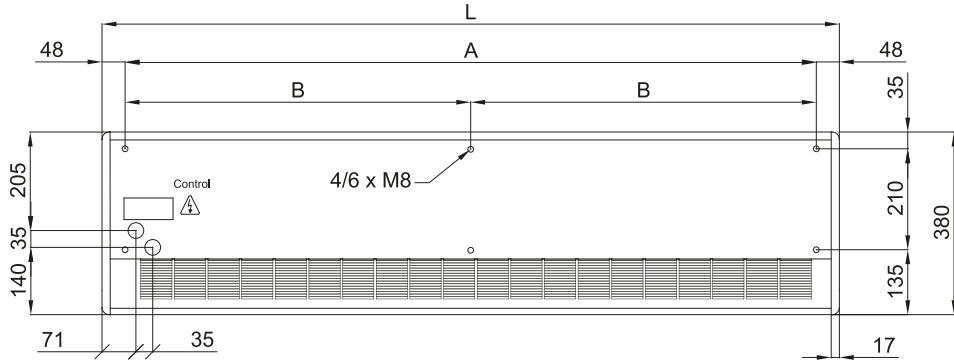

	L	A	B
Aris 1000	1034	940	-
Aris 1500	1534	1440	-
Aris 2000	2034	1940	970